

## NATURAL GAS GENERATOR SET

# PPU1500NG

### Applicable Conditions

<b>Installation Place</b>	Indoor
<b>Ambient Temperature</b>	0°C ~ 35°C
<b>Ambient Humidity</b>	<60%
<b>Altitude</b>	100m

### System Ratings (kWe/kVA)

Load:	[%]	100	75	50
Electrical power COP acc. ISO 8528-1:	[kW]	1516	1137	758
Fuel consumption:	[kW+5%]	3428	2620	1826
Thermal efficiency:	[%]	45.7	46.8	48.0
Electrical :	[%]	44.2	43.4	41.5
Total efficiency:	[%]	89.9	90.2	89.5

### Applicable Standard

Low voltage Directive 2006/95/EG  
 EMV Directive 2004/108/EG  
 Lloyds CSC Certified  
 Corners of container (ISO1161)  
 Protective coating (CSN EN12944)  
 Safety instruction according to international standard (ISO3864 / ANSI Z535)  
 Conformance Européenne (2006/42/EC,2014/35/EU · 97/23/EC)

### Engine

<b>Number of cylinders / configuration</b>	12V
<b>Engine speed</b>	1500 r/min
<b>Bore</b>	170 mm
<b>Stroke</b>	210 mm
<b>Displacement</b>	57.2 L
<b>Lube oil Capacity</b>	280 L
<b>Exhaust gas emissions</b>	
<b>NOx, stated as NO2 (dry, 5% O2)</b>	< 500 mg/m <sup>3</sup> i.N
<b>CO (dry, 5 % O2)</b>	< 1000 mg/m <sup>3</sup> i.N

### Alternator


<b>Construction</b>	Double Bearing
<b>Control System</b>	AVR with PMI Excited
<b>Insulation</b>	Class H
<b>Protection</b>	IP23
<b>Rated Power Factor</b>	0.8
<b>Efficiency (Cont. 100%)</b>	0.96
<b>No of Pole and Phase</b>	4 Poles 3 Phase 4 Wire

### Acoustic

<b>Sound pressure level</b>	95dB(A)
<b>Tolerance</b>	+2dB(A)
<b>Distance from genset</b>	1m
<b>Reference height above ground</b>	1.5m

# Specification

## Generator Set layout, Dimensions and Weight

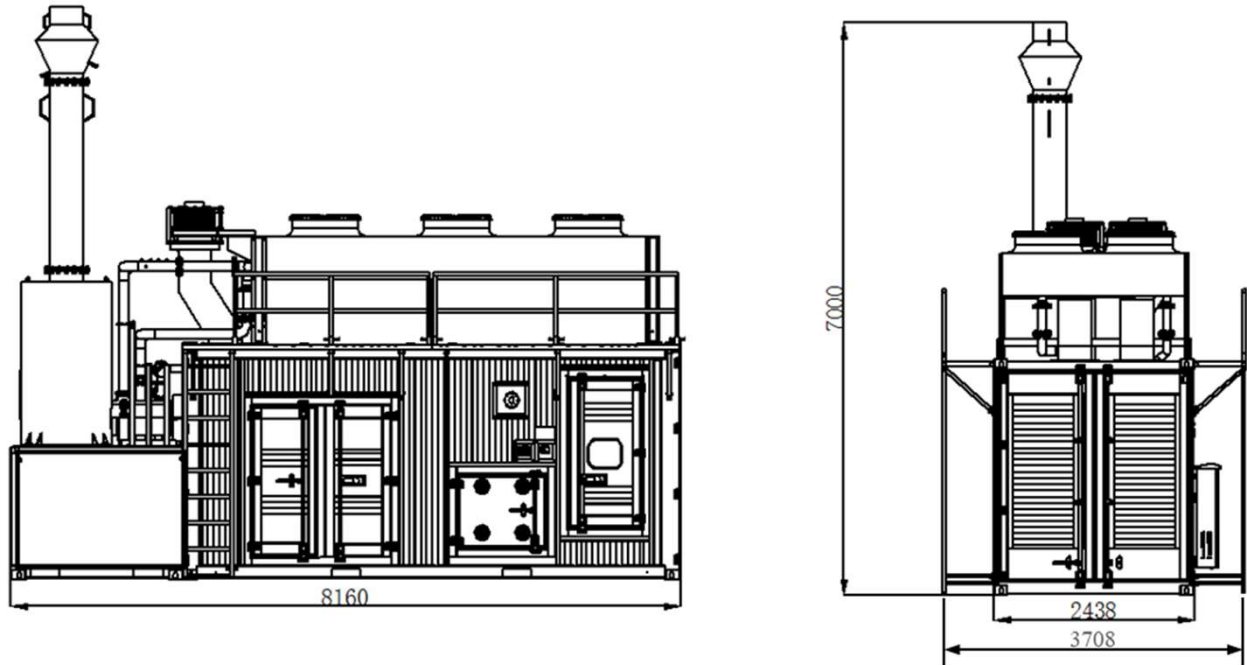

Genset Model	Dry Weight ( kg)	Dimensions (LxWxH) mm
PPU1500NG	Approximately 26,630	8160 x 3708 x 7000

Please contact your local VPower dealer for further information. Please note that products illustrated may differ from production models. Not all models and accessories are available in all markets, and standard equipment may vary between different markets. Every effort has been made to ensure that facts and figures are correct at the time of publication. However, VPower reserves the right to make changes without prior notice at any time.

United Kingdom  
VP FLEXGEN LIMITED

Singapore  
VPower Holdings (Singapore)  
PTE Ltd.

China  
VPower Engineering  
China Limited

Brazil  
VP FlexGen(Brazil) Spe  
Ltda

WWW.VPOWER.COM



VPOWER GROUP  
INTERNATIONAL HOLDINGS LIMITED  
UNITS 2701-05, OFFICE TOWER 1,  
THE HARBOURFRONT  
18-22 TAK FUNG STREET, HUNG HOM  
HONG KONG  
Tel : +852 2687 6517 Fax : +852 2687 6854  
info@vpower.com

Middle East  
VPower Middle East FZCO

Indonesia  
PT VPower Operation  
Services Ltd

Yangon  
VPower Group Holdings  
(Yangon) Ltd

Peru  
VPTM Iquitos S.A.C  
Genrent del Peru S.A.C

HKEx Stock Code: 1608