

NATURAL GAS GENERATOR SET

PPU2535NG

Applicable Conditions

| | |
|----------------------------|------------|
| Installation Place | Indoor |
| Ambient Temperature | 0°C ~ 35°C |
| Ambient Humidity | <60% |
| Altitude | 100m |

System Ratings (kWe/kVA)

| Load: | [%] | 100 | 75 | 50 |
|---------------------------------------|---------|------|------|------|
| Electrical power COP acc. ISO 8528-1: | [kW] | 2535 | 1901 | 1268 |
| Fuel consumption: | [kW+5%] | 5781 | 4410 | 3053 |
| Thermal efficiency: | [%] | 46.4 | 47.7 | 49.0 |
| Electrical : | [%] | 43.9 | 43.1 | 41.5 |
| Total efficiency: | [%] | 90.3 | 90.8 | 90.5 |

Applicable Standard

Low voltage Directive 2006/95/EG
 EMV Directive 2004/108/EG
 Lloyds CSC Certified
 Corners of container (ISO1161)
 Protective coating (CSN EN12944)
 Safety instruction according to international standard (ISO3864 / ANSI Z535)
 Conformance Européenne (2006/42/EC,2014/35/EU · 97/23/EC)

Engine

| | |
|--|------------------------------|
| Number of cylinders / configuration | 20V |
| Engine speed | 1500 r/min |
| Bore | 170 mm |
| Stroke | 210 mm |
| Displacement | 95.3 L |
| Lube oil Capacity | 450 L |
| Exhaust gas emissions | |
| NOx, stated as NO2 (dry, 5% O2) | < 500 mg/m ³ i.N |
| CO (dry, 5 % O2) | < 1000 mg/m ³ i.N |

Alternator


| | |
|--------------------------------|------------------------|
| Construction | Double Bearing |
| Control System | AVR with PMI Excited |
| Insulation | Class H |
| Protection | IP23 |
| Rated Power Factor | 0.8 |
| Efficiency (Cont. 100%) | 0.954 |
| No of Pole and Phase | 4 Poles 3 Phase 4 Wire |

Acoustic

| | |
|--------------------------------------|---------|
| Sound pressure level | 95dB(A) |
| Tolerance | +2dB(A) |
| Distance from genset | 1m |
| Reference height above ground | 1.5m |

Specification

Generator Set layout, Dimensions and Weight

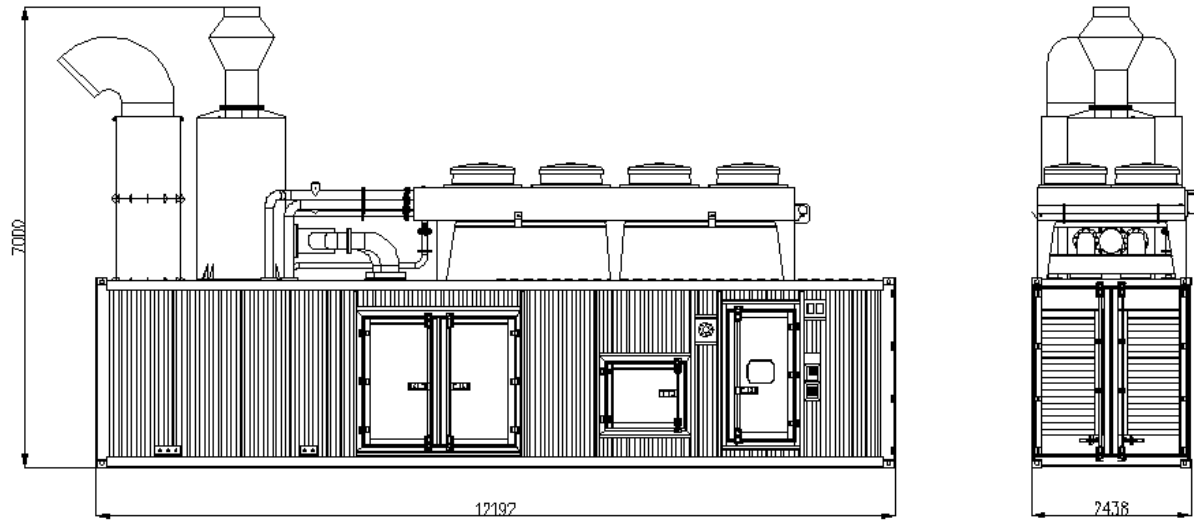

| Genset Model | Dry Weight (kg) | Dimensions (LxWxH) mm |
|--------------|----------------------|-----------------------|
| PPU2535NG | Approximately 39,820 | 12192 x 2438 x 7000 |

Please contact your local VPower dealer for further information. Please note that products illustrated may differ from production models. Not all models and accessories are available in all markets, and standard equipment may vary between different markets. Every effort has been made to ensure that facts and figures are correct at the time of publication. However, VPower reserves the right to make changes without prior notice at any time.

United Kingdom
VP FLEXGEN LIMITED

Singapore
VPower Holdings (Singapore)
PTE Ltd.

China
VPower Engineering
China Limited

Brazil
VP FlexGen(Brazil) Spe
Ltda

WWW.VPOWER.COM



VPOWER GROUP
INTERNATIONAL HOLDINGS LIMITED
UNITS 2701-05, OFFICE TOWER 1,
THE HABOURFRONT
18-22 TAK FUNG STREET, HUNG HOM
HONG KONG
Tel : +852 2687 6517 Fax : +852 2687 6854
info@vpower.com

Middle East
VPower Middle East FZCO

Indonesia
PT VPower Operation
Services Ltd

Yangon
VPower Group Holdings
(Yangon) Ltd

Peru
VPTM Iquitos S.A.C
Genrent del Peru S.A.C

HKEx Stock Code: 1608