

NATURAL GAS GENERATOR SET

PPU3300NG

Applicable Conditions

Installation Place	Indoor
Ambient Temperature	0°C ~ 35°C
Ambient Humidity	<60%
Altitude	100m

System Ratings (kWe/kVA)

Load:	[%]	100	75	50
Electrical power COP acc. ISO 8528-1:	[kW]	3,360	2,516	1,669
Fuel consumption:	[kW+5%]	7507	5758	4008
Thermal efficiency:	[%]	27.2	24	23.8
Electrical :	[%]	44.8	43.7	41.6
Total efficiency:	[%]	71.9	67.7	65.5

Applicable Standard

Low voltage Directive 2006/95/EG
 EMV Directive 2004/108/EG
 Lloyds CSC Certified
 Corners of container (ISO1161)
 Protective coating (CSN EN12944)
 Safety instruction according to international standard (ISO3864 / ANSI Z535)
 Conformance Européenne (2006/42/EC,2014/35/EU · 97/23/EC)

Engine

Number of cylinders / configuration	20V
Engine speed	1500 r/min
Bore	190 mm
Stroke	220 mm
Displacement	124.75 L
Lube oil Capacity	TBA
Exhaust gas emissions	
NOx, stated as NO2 (dry, 5% O2)	< 500 mg/m ³ i.N
CO (dry, 5 % O2)	< 1000 mg/m ³ i.N

Alternator


Construction	Double Bearing
Control System	AVR with PMI Excited
Insulation	Class F
Protection	IP23
Rated Power Factor	0.8
Efficiency (Cont. 100%)	0.97
No of Pole and Phase	4 Poles 3 Phase 4 Wire

Acoustic

Sound pressure level	95dB(A)
Tolerance	+2dB(A)
Distance from genset	1m
Reference height above ground	1.5m

Specification

Generator Set layout, Dimensions and Weight

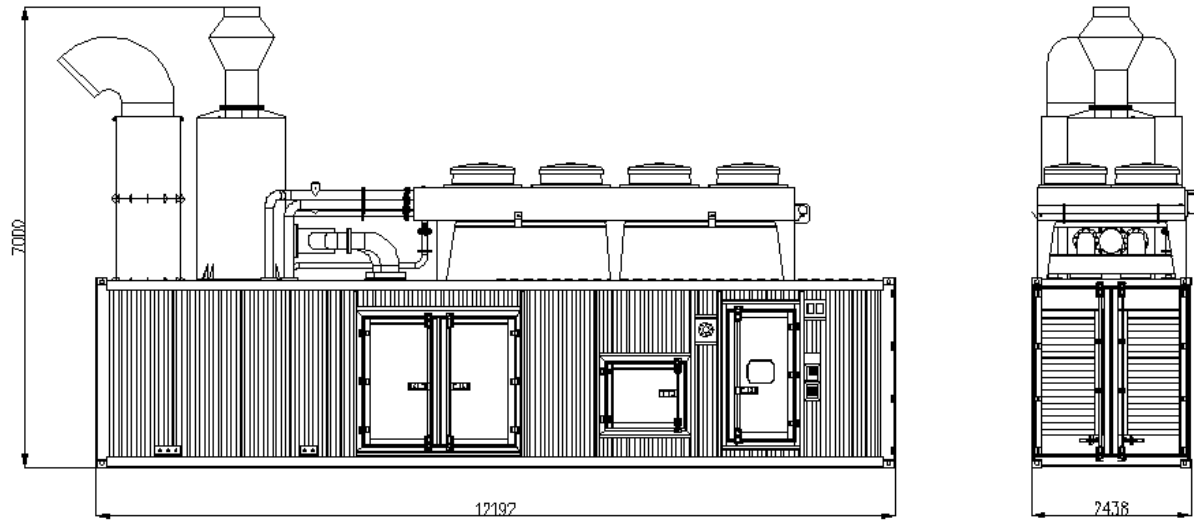

Genset Model	Dry Weight (kg)	Dimensions (LxWxH) mm
PPU3300NG	Approximately 28,000	12192 x 2438 x 7000

Please contact your local VPower dealer for further information. Please note that products illustrated may differ from production models. Not all models and accessories are available in all markets, and standard equipment may vary between different markets. Every effort has been made to ensure that facts and figures are correct at the time of publication. However, VPower reserves the right to make changes without prior notice at any time.

United Kingdom
VP FLEXGEN LIMITED

Singapore
VPower Holdings (Singapore)
PTE Ltd.

China
VPower Engineering
China Limited

Brazil
VP FlexGen (Brazil) Spe
Ltda

WWW.VPOWER.COM



VPOWER GROUP
INTERNATIONAL HOLDINGS LIMITED
UNITS 2701-05, OFFICE TOWER 1,
THE HABOURFRONT
18-22 TAK FUNG STREET, HUNG HOM
HONG KONG
Tel : +852 2687 6517 Fax : +852 2687 6854
info@vpower.com

Middle East
VPower Middle East FZCO

Indonesia
PT VPower Operation
Services Ltd

Yangon
VPower Group Holdings
(Yangon) Ltd

Peru
VPTM Iquitos S.A.C
Genrent del Peru S.A.C

HKEx Stock Code: 1608